



LED FLUORESCENT LAMP

ITEM	DC Type	Electronic Ballast Type	AC Type
Part No.	KT8DC	KT8EC	KT8AC
Brightness(1M)	415lx	396lx	350lx
Lumens	1500lm	1580lm	1600lm
Efficiency	71(lm/W)	72(lm/W)	64(lm/W)
Color Temp.(K)	6,500° ~7,000° (White)	6,000° (White)	6,500° (White)
Input Power	100~240VAC to SMPS	100~240VAC	200VAC 50/60Hz
Driving Voltage	48VDC	40VDC	48VDC
Power Consumption	21W ± 5%	22W	25W
Control system	Constant current	Constant current	Constant current
Base	AL	AL, PC	AL, PC
Operation Temp.	-20~60°C	-20~60°C	-20~60°C
Storage Temp.	-40~80°C	-40~80°C	-40~80°C
Life Time	50,000Hrs	50,000Hrs	50,000Hrs
Ra.	70 CRI	70 CRI over	70 CRI over
Protection Rating	Indoor	Indoor	Indoor
Lighting Area	170°	150°	150°

Dimension / Unit:mm

DC Type



29 x 1200(L)

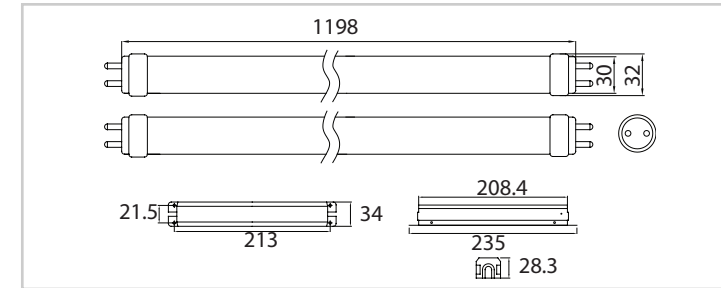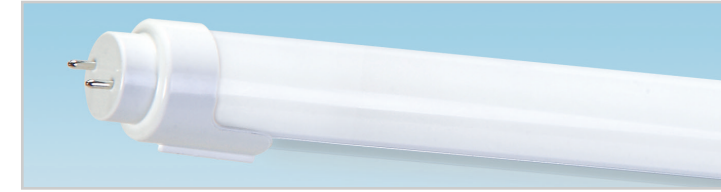

SMPS For T8 Lamp



Electronic Ballast Type

29 x 1200(L)

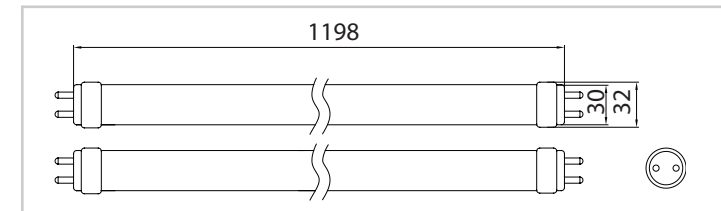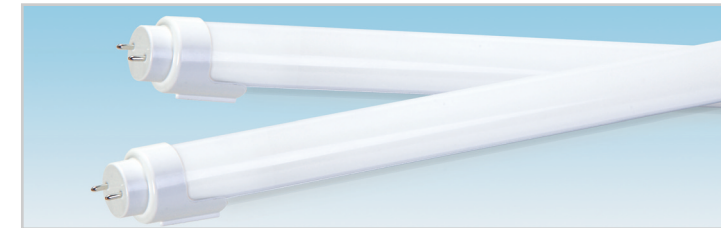

AC Type

29 x 1200(L)

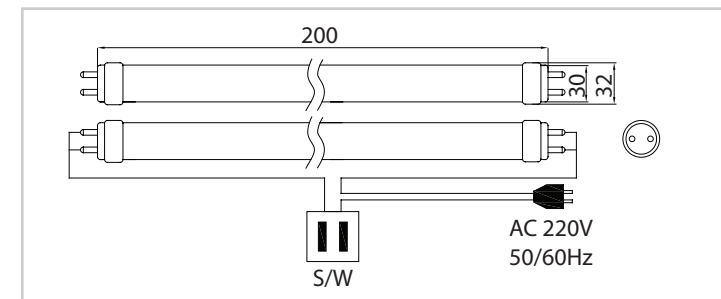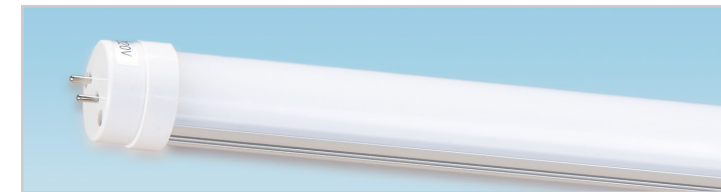

LED FLUORESCENT LAMP